
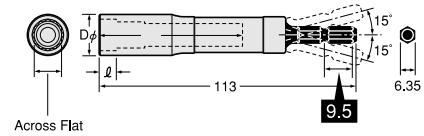


Tilt Sockets

Super performance socket that can be used tilted or locked

New

PAT.P.



Model No.	EDP No.	A / F mm	Dφ mm	Length mm	Full length mm
WB451011	486373	10	16	6.5	113
WB451211	486374	12	18	7.5	113
WB451311	486375	13	19	8	113
WB451411	486376	14	20	8	113
WB451711	486377	17	23	9	113
WB451911	486378	19	25	10	113
WB452111	486379	21	28	11	113

Tilt Bit Holders

Mounts bit. Completely transforms bit by enabling it to Tilt driving.


New

PAT.P.



When tightening in corners, users can apply pressing force vertical to the screw, so the screw head and bit are not damaged.

Installing tension and angle brackets



Thanks to a hand-turned grip, users can work in a stable posture.
 ※ Do not turn attachments idly when mounted on a power tool.

Model No.	EDP No.	Bit insertion mm	Outer diameter mm	Full length mm
WB45J100	486381	6.35	18	100

Tilt Socket Adapters


Use your own sockets and tilted up to 15°.

New



PAT.P.



Push in-Straight Driving




Pull out-Tilt Driving



Axial press-fitting is not effective with all sockets. Minimized wear is the key to single body adapters.

High hardness HRC60 to prevent wear on corners



Model No.	EDP No.	Socket insertion mm	Diameter mm	Full length mm
B45WSQ3	486382	9.5	13	50
B45WSQ4	486383	12.7	16	60

To meet best retaining in tool anvil, be sure if it's 13mm or 9.5mm distance to the retainer steel ball from the bit end.