


For Pneumatic and Electric Power Bits (Type A)



VESSEL BITS SINCE 1954

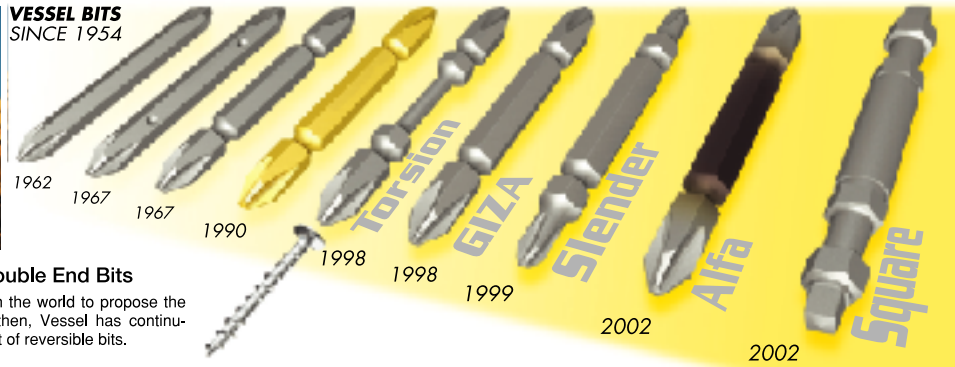

History of the Double End Bits

Vessel was the first in the world to propose the reversible bit. Since then, Vessel has continuously led development of reversible bits.

Shape	Model No.	Size Tip×Overall Length (ℓ)	Heat treatment classification	Inner Ctn.	Outer Ctn.	Applicable models
	A7	⊕ 0× 36	H	10	100	VESSEL GT-H2
		70	H	10	100	
		100	H	10	100	
		⊕ 1× 36	H	10	100	
		70	H	10	100	
	A9	⊕ 1× 40	H	10	100	VESSEL GT-H3P
		70	H	10	100	
		⊕ 2× 40	H	10	100	
		70	H	10	100	
	A11	⊕ 1× 50	H	10	100	Uryu US-3 US-3W
		75	H	10	100	
		⊕ 2× 50	G.E	10	100	
		⊕ 2× 100	G	10	100	

Shape	Model No.	Size Tip×Overall Length (ℓ)	Heat treatment classification	Inner Ctn.	Outer Ctn.	Applicable models
	A14	⊕ 1× 45	H	10	100	VESSEL GT-H4R-H4PR-H4.5-HER-H5P-PH4-PH5-S4.5D-S4.5DR- PLR-PLZ-PLP-PLH-PSM-R-PSH-S-SS-SD-P4.5D- P4.5DR-P6L5-P6GD-P6XD-P6L5L-P6MS-P6HS- P6SD-S4TR-S4TS-S4TG-S5TR-S5TB-S5TG-S5TS NPK SD-4 ND-SL-PL-6L-FAY-6HSY-6HP-6SDY-6SDY-6PDY NPW-45DA-DYO-55DA-DYO-450EA-DYO-450A-TDY- 550A-TDY Fuji Kuki FPW-35SD-10-440D-20-550D-20-660D-30-770D-20- 40SD-10-44SD-10-55SD-10-66SD-10-66SD-10 FET-44D-20-55D-20-66D-20 FW-55X-70-80-65X-60-5PXD-60-6PXD-60- 6PMD-10-44SD-10-66SD-10-44PD-10-66PD-10- 44SAD-10-66SAD-10-44PAD-10-66PAD-10 FPT-440D-10-10L-550D-10-10L-660D-10-10L- 440SD-10-550SD-10-660SD-10 MAX AT475DP Yutani C-6SSAEL-5WPEA-6SPAL-6SPALE-600SHEA- 6WWSHEA-602A-6SH-PAL CH-4-5PEA Yokota YLa-70B-80B YX-180SB-280SB-380SB-500SB-80B-180B-280B- 380B-500B YD-400SB-4-5P6ZK-6P6Z-6P6T6Z- 600P6Z-650P6Z-40P6Z-4-5L6Z-6W6ZK-600SBZ- 670B-670B-F-670B-R-670B-RF Y-40SB-41B-46B Toshiba CIBL-144VA Hitachi Koki WH-6DC-8DYA-9DM-9DM2-10AC-10VA2- 12DM-12DMR-12DM2-12VB-12AB-12DK-12VA- 12VC-12VD-14DM-14VA-14DH W-10A-12DM-W-5M-6M-5VC-5VD-6VC-6VH-6VJ-6V- W-5A-W5VE-W6W Makita TD-124D, 123D, 130D, 150D, 1000D, 061D 6918D, 6990D, 6960D, 6919N, 6954, 6954SP, 6954SPK, 6904V, 6700N, AD603, FS2300 6812, 6812SP, 6813SP, 6901N Matsushita EZ-7200-6507-7201-6506-6502-6605- 6582-6404-6120-6780-7301-7270-7202-7203 EZT141-640-607-610-611-612 Ryobi ID-S-12-80-121-130-140, CID-800, BID-1211-900-1220-1255-1230-121-122-123, AID-10 Tonichi AUR5N
		⊕ 2× 45	X.H.G.E	10	100	
		65	X.H.G.E	10	100	
		110	X.H.G.E	10	100	
		150	X.H.G.E	10	100	
		200	X.H.G.E	10	150	
		300	G	10	100	
		⊕ 3× 45	X.H.E	10	100	
		65	X.H.E	10	100	
		110	X.H.E	10	100	

	M-A14	⊕ 1× 45	H	10	100
		65	H	10	100
		110	H	10	100
	MG Magnetic	⊕ 2× 45	H.G	10	100
		65	H.G	10	100
		110	H.G	10	100


	A14H	⊕ 2× 65	H	10	100
		110	H	10	100
		150	H	10	100
	A14B	⊕ 2× 50	S	10	100
		75	S	10	100
		100	S	10	100
		150	S	10	100

	AL14	⊕ 2× 65	H	10	100
		110	H	10	100


	AT14	⊕ 2× 3.5× 65	H	10	100
		110	H	10	100

● For the order, specify the Model No., size, heat treatment class and quantity. Ex.) A14 ⊕ 2× 65H 100 pcs.

■ Connection of a bit and a power tool
The size of a bit clamping part is determined in consideration of the installed condition of each power tool.



TYPE 6.35mm ●
A14, M-A14, A14H, A14B, AL14, AT14
AS14, AZ14



TYPE 6.35mm ●
AZ16, A16

● The models in blue letters are the screwdrivers for light steel substrates and boards. It is recommended to use a 45mm long bit.