

JC-3 Series Speed and Acceleration


Maximum portable loads are as follows :

Single sided, 3 Axes : 4kg


Double sided, 3 Axes : 8kg

Double sided, 4 Axes : 3kg

Single sided, 3 Axes

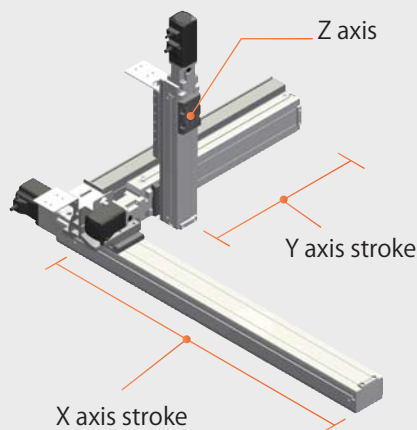


Double sided, 3 Axes

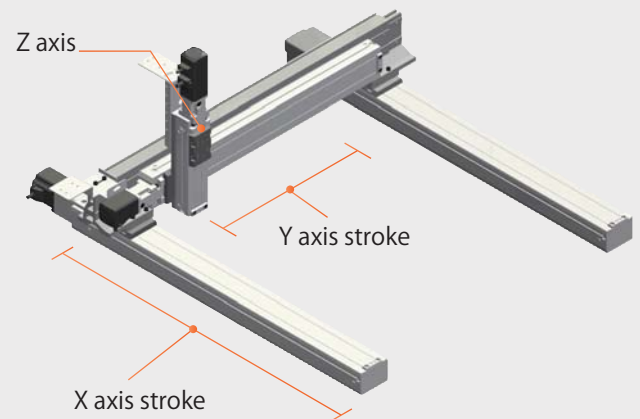

X axis (by X and Y stroke lengths)


For X sliders up to 400mm

Measured with robot carrying its maximum portable load.

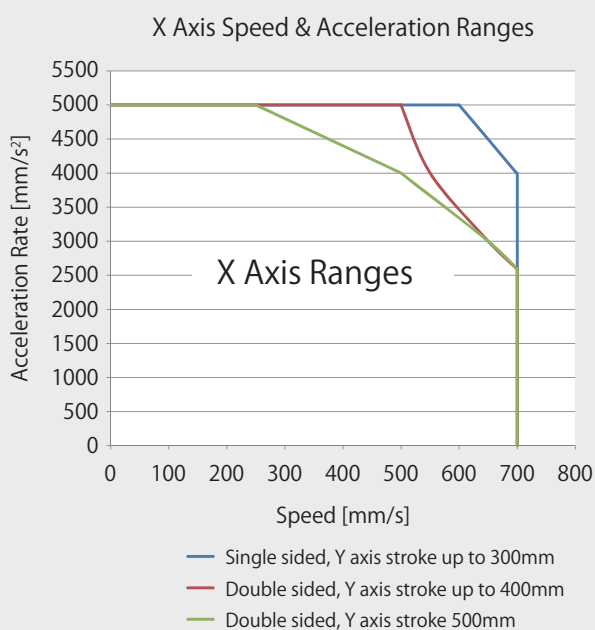

For X sliders 500~600mm


Measured with robot carrying its maximum portable load.

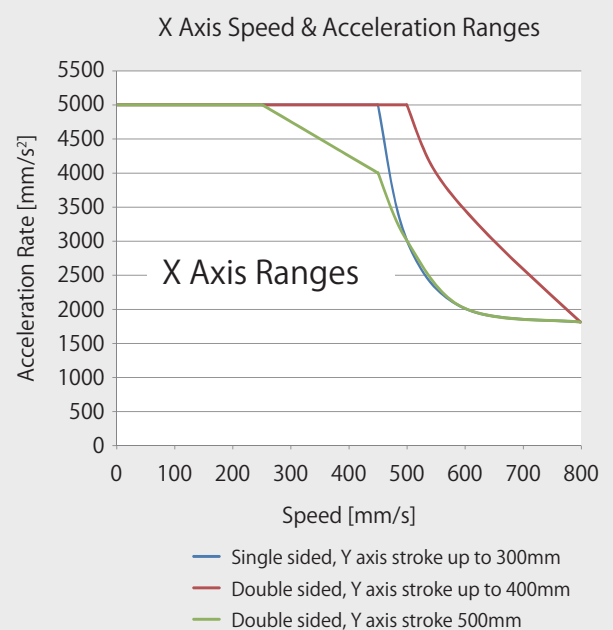

Y Axis (by Y stroke length)


For Y sliders up to 400mm

Measured with robot carrying its maximum portable load.

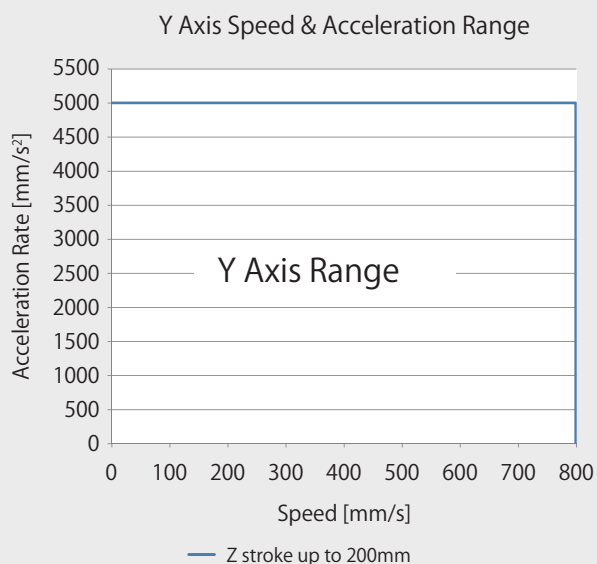

For 500mm Y Slider

Measured with robot carrying its maximum portable load.

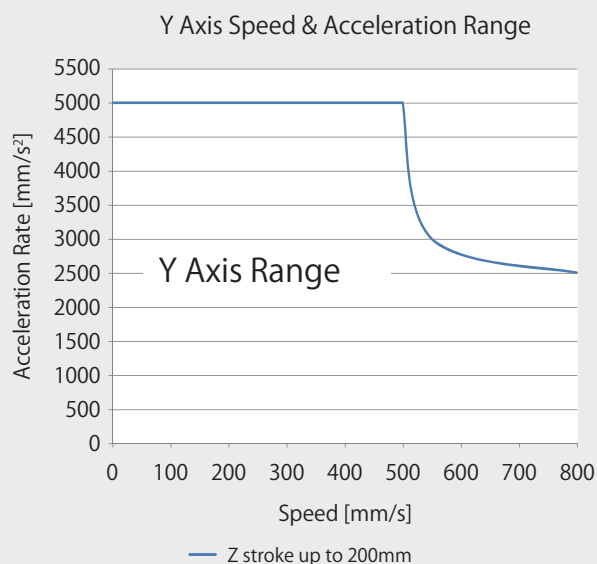

Z Axis (by the number of axes)

For 3 Axes

Measured with robot carrying its maximum portable load.

Speed 400mm/s, Acceleration 2500mm/s²

For 4 Axes

Measured with robot carrying its maximum portable load.

Speed 400mm/s, Acceleration 1800mm/s²


R Axis

For 4 Axes

Measured with robot carrying its maximum tool weight.

Speed 900° /s, Acceleration 5000° /s²

Double sided, 4 axes

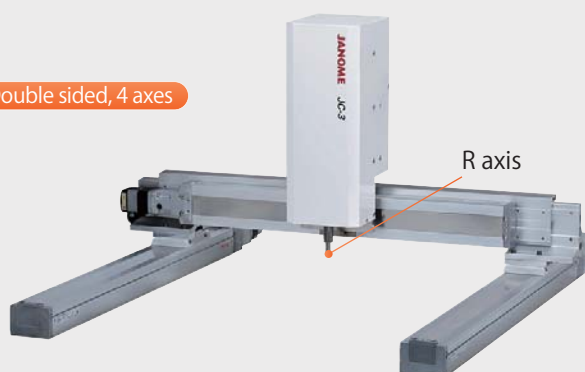

• Specifications may change without notice to improve product quality.

2015.04 (E)

Janome Sewing Machine Co., Ltd. Industrial Equipment Sales Division

1463 Hazama-machi, Hachioji-shi, Tokyo 193-0941

Tel: +81-42-661-6301 FAX: +81-42-661-6302

E-mail : j-industry@gm.janome.co.jp

URL: <http://www.janome.co.jp/industrial.html>