



Optional attachments


It can be attached to the gauge and the stand of our products.
Please contact us for other equipment and details like.




CML-500M6
Flat type chuck
Max. load 500 N
Mounting screws M6 Female
Max. opening width 50mm



LV-20M6
L type chuck
Max. load 20 N
Mounting screws M6 Female
Max. opening width 15mm



CMS-500M6
Flat type chuck
Max. load 500 N
Mounting screws M6 Female
Max. opening width 10mm




DB-500
Center open vice
Max. load 500 N
Max. opening width 65mm




RCK-200M6
Cylinder chuck
Max. load 200 N
Mounting screws M6 Female
Max. opening Diameter $\phi 4$



FV-50M6
Pin chuck
Max. load 50 N
Mounting screws M6 Female
Max. opening width 1.5mm

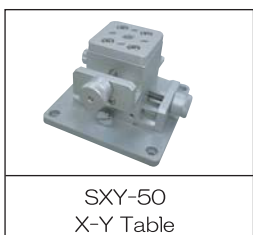

SXY-50
X-Y Table
Max. load 500 N
Moving distance X = 30mm
Y = 30mm

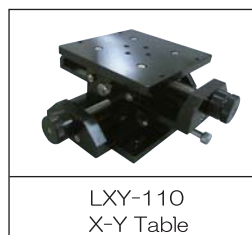

LXY-110
X-Y Table
Max. load 500 N
Moving distance X = 75mm
Y = 75mm




SPL-20-100
90 degree peel jig
Max. load 20 N
Mounting screws M5x4
Moving distance 100mm




MGL-500-150
3-point bending jig
Max. load 500 N
Max. opening width 150mm

Other main products

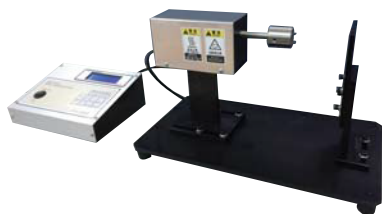

Tabletop torsion
endurance testing machine

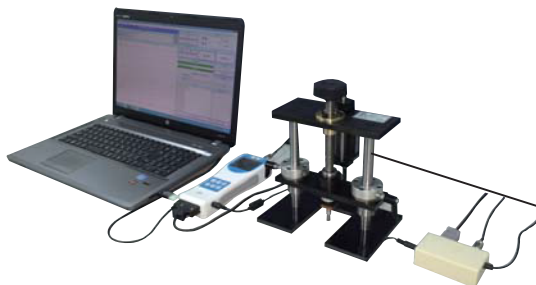

Temperature expansion
coefficient evaluation
for load application device



Torque durability
testing machine

After-sale service

Regarding traceability and repair, proofreading, official approval, making of documents
please refer either to us or the following agency.

- For improvement purposes, the rating or design of the product may change without prior notice.
- All products are sold without stands unless otherwise specified.
(All the gauge and the jigs attached to the stands of the catalogue photograph are images)
- The true color of the product may differ slightly due to reprinting.

Sales agent



DigiTech co., ltd.

1-6-2, MINAMITSUMORI, NISHINARI-KU,
OSAKA, JAPAN 557-0063
TEL : +81-(0)6-6655-5200 FAX : +81-(0)6-6655-5800
URL : <http://www.dt-digitech.jp/>